

Letter of Compliance

Product Application

Compressed air
Inert gases such as Nitrogen, Argon, CO2
Non-Potable Water

Technical Specification



Operating pressure 232 psi
Operating Temperature -40°F to +140°F
Vacuum Rating to 29 Hg

System Ratings

ASTMF1282
ASTMF3347
OSHA Compliant

Flexible Tubing Specifications

Multi-layer Tubing, inner-outer HDPE, center layer-alum overlap welded
Blue or Green Color outer layer, white inner layer
Tubing can be direct buried under ground, wrap fittings for protection
Cover or paint if installed in outside applications to protect from UV

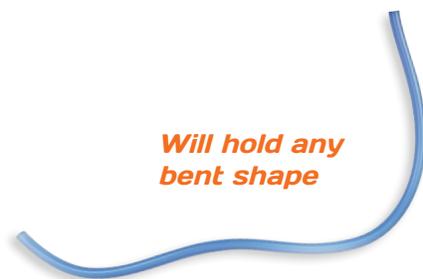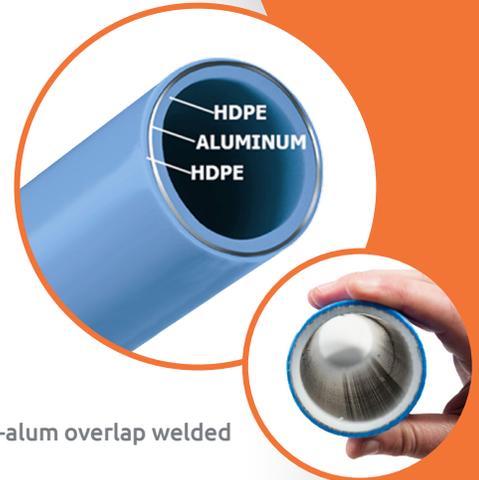

Will hold any bent shape

Bend Radius:

1/2" Tubing: 4-6 inches
3/4" Tubing: 8-10 inches
1" Tubing: 10-12 inches
2" Tubing 36-40 inches



Fitting Specifications

Press Type
Nickel plated brass body
304 Stainless Steel Crimp Sleeve
Double Nitrile Oring seal

