

Letter of Compliance


Product Description: Modular compressed air piping system 3/4" thru 6" Fastpipe

Technical Specifications: Compressed air, vacuum (29in-Hg), and inert gas applications 190 psi maximum working pressure, 600 psi burst pressure, temp range 0°F to 140°F Compatible with common compressor lubricants


General Ratings: Conforms to ASME B31.1
UL94HB fire resistance, compliant to OSHA

Pipe Specifications:

Pipe:
Aluminum alloy grade 6063 USA produced, 3/4"-2"
Aluminum alloy grade 5052 3"-6"
Blue powder coat, color RAL5012
Green powder coat, color RAL6018 outside 3/4"-2"
Non-chromate conversion coating inside
Trade size callout measured with O.D.



3/4" size	20 mm	.79 O.D. x .69 I.D. .98
1" size	25mm	O.D. x .87 I.D. 1.57
1 1/2" size	40mm	O.D. x 1.43 I.D. 1.97
2" size	50mm	O.D. x 1.81 I.D. 3.15
3" size	80mm	O.D. x 2.98 I.D.
4" size	100mm	4.20 O.D. x 3.78 I.D.
6" size	150mm	6.02 O.D. x 5.75 I.D.

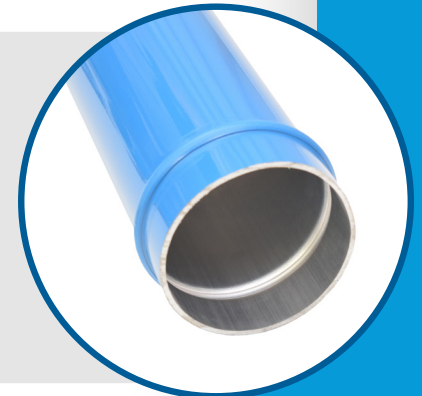

Fitting Specifications:

Compression Style

3/4" thru 2" Body: nylon 6 with fiberglass reinforcement, blue color

3" Body: Diecast aluminum, then electrocoated, black color

Bite Ring: stainless steel

O-Ring: nitrile



Compression Style

3" Body: Diecast aluminum, then electrocoated, black color

Bite Ring: stainless steel

O-Ring: nitrile



Lug Style

4" - 6" Body: Diecast aluminum/Steel, Powdercoat

Inner Seal: nitrile



PRODUCTS MANUFACTURED BY THE SELLER CARRY A LIMITED ONE YEAR WARRANTY

RapidAir Products | www.rapidairproducts.com
6111 Mill Creek Drive Auburndale, WI 54412 | 800-954-3310